

dB Solvent-HF-165

Product # 387

High flash industrial degreaser

Developed to safely remove grease, oil and tar from a variety of surfaces. It works quickly on metal parts without causing corrosion under normal conditions. A blend of natural and synthetic compounds that combine to produce a remarkably effective product. Natural citrus extracts produce incredible solvency to cut through the most difficult deposits. Carefully selected solvents, chose for their low toxicity and lack of effect of atmospheric ozone complete this newest development in industrial solvents. The light, fresh scent makes even the most tedious and unpleasant task more bearable.

Features and Benefits

- Industrial strength parts washer
- Quickly penetrates grease, oil and tar deposits
- Ideal for use in a recirculating parts washer

Properties

| | |
|----------------------------|------------------------|
| Appearance..... | Colorless liquid |
| Fragrance | Citrus |
| Ready to Use..... | Yes |
| Specific gravity..... | 0.88 |
| d-Limonene content..... | 15% |
| Biodegradable..... | Yes |
| Chlorinated solvents | No |
| Flash point..... | 165 ° F |
| Application | liquid dip tank, spray |

Directions

Spray Cleaning: Spray solvent directly onto part. Wipe dry or allow to air dry.

Dip Tank degreasing: Dip parts to be cleaned. Soak the grease and grime off the parts, then just let dry.

Active Ingredients

| |
|---|
| Paraffinic and Naphthenic solvent blend |
| d-Limonene..... |
| Orange fragrance..... |

CAS Number

64742-46-8
5989-27-5
Proprietary

Safety


Caution: May be harmful if swallowed. May irritate eyes and skin. Keep out of the reach of children

DOT Shipping (ground transportation)

| | |
|-----------------------|------|
| Proper Shipping Name: | None |
| Class: | None |
| ID Number: | None |
| Packing Group: | None |

NFPA RATINGS

Flammability

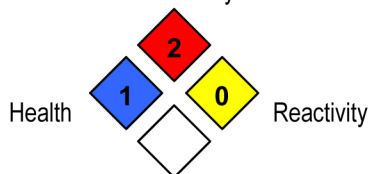

Quantities

- 30, 35 & 55 gallon
- 5 or 6 gallon
- 6 X 1 gallon
- 4 X 1 gallon



GREEN PRO SOLUTIONS - We Live In The Solution
Coral Springs, Florida 33065 • 1-888-334-0013