

## Bentone-based lubricant

Keep industrial equipment and machinery operating at peak performance with this versatile aerosol lubricant designed to endure high temperatures and extreme pressures. Its thick, clinging gel formula uses a tacky, cohesive, non-melt grease that offers outstanding anti-wear properties. It also seals out moisture to offer excellent protection against rust and corrosion.

### Use on High-Friction Applications:

- Construction
  - Mining
  - Gears
  - Chains
  - Fittings
- Fleet
  - Steel
  - Conveyors
  - Cables
  - Wheel Bearings
- Marine
  - General Industrial
  - Tools
  - Sprockets
  - Power Winches

### Effective Against

- Friction
  - Seizing
  - Excessive wear
- Rust
  - Pounding out
  - Galling
- Corrosion
  - Wash out
  - High temperatures

### Features and Benefits

- Sprays as a penetrating liquid, then quickly sets up to a durable, protective gel.
- Seals out moisture for long-lasting lubrication and rust protection.
- Sets up in seconds and cures completely in 15 to 20 minutes.
- Non-melting with exceptional adhesive and cohesive properties.

### Properties

Appearance.....	Thick Gold Emulsion
Fragrance.....	None
Specific gravity.....	<1
Spray Pattern.....	Spray
Extension Tube.....	Yes

### Directions Complete directions on product label

Spray without extension tube for wide application. Spray with extension tube for precise application.

### Active Ingredients

Hexane .....	.....
Petroleum Distillates .....	.....
Liquefied Petroleum Gas .....	.....

### CAS Number


110-54-3
64742-54-7
74-98-6

### Safety

Danger: Extremely Flammable Vapor harmful or fatal if inhaled. May cause skin irritation. Keep out of the reach of children

### DOT Shipping (ground transportation)

Proper Shipping Name:	Consumer Commodity
Class:	ORM-D
ID Number:	None
Package Group:	None

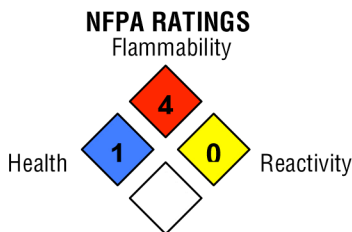

### Quantities

- 12 cans/case
- 16 oz can
- 11 ounce net weight



**GREEN PRO SOLUTIONS - We Live In The Solution**  
Coral Springs, Florida 33065 • 1-888-334-0013