

High-gloss floor finish

This high-gloss liquid floor finish utilizes a unique combination of reactive synthetic polymers to produce a finish that can withstand the rigors of frequent burnishing. It is designed for easy maintenance and offers superior scratch and scuff resistance, which reduces the frequency of restoration and recoating operations. It dries fast with an incredible "wet-look" gloss, and can be used in both spray buffing and burnishing operations.

Use On:

- Tile
- Vinyl
- Linoleum
- Hardwood

Features and Benefits

- Gives floors a reflective "wet-look" finish.
- Protects against black marks, scuffing and scratching.
- Endures the rigorous action of high-speed burnishers without streaking or powdering.
- Two coats of this durable finish seals and protects floors.
- Fast-drying formula reduces labor costs and building down time.

Properties

Appearance.....	White Liquid
Fragrance.....	Mild
Stability.....	1 year (damaged by freezing)
Solids content.....	22% by wt.
Gloss (Initial).....	5
Gloss (After Buffing).....	5
Durability.....	3
Water/Detergent Resistance...	5
Leveling.....	5
Removability/Stripability.....	5

Arbitrary scale of 1 - 5, 5 = BEST

Directions Complete directions on product label

Apply at a rate of 1,850 square feet per gallon. Two coats are recommended for spray buffing, 4 coats are recommended for burnishing operations.

Maintenance:

Dust mop daily using *Clear Attractions Dust Mop Treatment*. Dirt and dust can abrade and scratch your finishes, destroying their natural luster.

Damp mop regularly with *Excel Floor Cleaner*. The highest gloss comes only from clean floors. Dirt acts as a barrier to light reflection, causing your floors to look dull and lifeless.

Active Ingredients

Water	
Non-hazardous Ingredients.....	
Diethylene Glycol Methyl Ether	

CAS Number

7732-18-5
 Proprietary
 111-77-3


Safety

Caution: May irritate eyes. Keep out of the reach of children.

DOT Shipping (ground transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

NFPA RATINGS

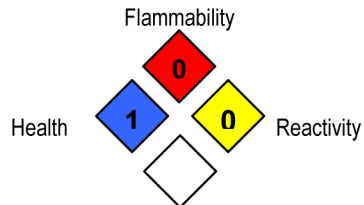

Quantities

- 30, 35 & 55 gallon
- 5 or 6 gallon
- 6 X 1 gallon
- 4 X 1 gallon