

# Fuel Treat

Product # 961

*Allows fuel to burn cleaner*

This liquid additive is designed for use in fuel systems where problems occur in the storage tank, as well as at fireside. It reduces the viscosity of all types of fuel oils and creates a fluidizing effect to promote faster pumping. As a result, fuel oil burns cleaner and more completely, which in turn reduces emission problems. It also forms a protective film on the internal surfaces of storage tanks and piping to reduce corrosion and deposit build-up.

## Effective Against

- Sludge formation
- Deposit build-up
- Corrosion
- High-fuel viscosity

## Features and Benefits

- Allows fuel to burn cleaner for increased efficiency and reduced pollution.
- Contains an organic combustion catalyst combined with corrosion inhibitors and dispersants.
- Retains a fluidizing effect at all temperatures for more uniform, faster pumping.

## Properties

Appearance.....	Golden liquid
Fragrance.....	Solvent
Specific gravity.....	0.881
Flash point.....	117° F

## Directions Complete directions on product label

**Initial Dose:** Pour 2 gallons per 1,000 gallons of fuel.

**Maintenance Dose:** Pour one quart per 1,000 gallons of fuel.

## Active Ingredients


Active Ingredients	CAS Number
Light Aromatic Solvent Naphtha.....	64742-95-6
1,2,4-Trimethylbenzene.....	95-63-6
Fuel Oil Conditioner.....	Proprietary
Corrosion Inhibitor.....	Proprietary
Xylene.....	1330-20-7

## Safety

Caution: Combustible. Harmful or fatal if swallowed. Eye Irritant. Keep out of the reach of children.

## DOT Shipping (ground transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

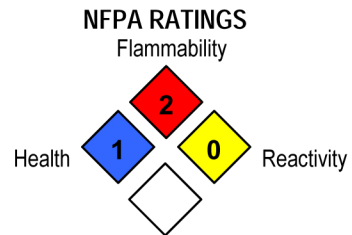

## Quantities

30, 35 & 55 gallon

5 or 6 gallon

6 X 1 gallon

4 X 1 gallon